ANCHOR

With hex head screw

Product informations

Universal anchor for fastenings on all types of masonry, plasterboard and concrete.

Product features

- particularly suitable in perforated and hollow walls
- thanks to its special shaping, allows expansion in 6 different directions for consistently effective anchorages on all types of masonry
- equipped with a dynamic collar that allows both a flush-wall installation and a through-wall installation
- anti-rotation mechanisms for perfect functionality during tightening

Installation

For proper installation of the anchor, drill the hole perpendicular to the support with a drill bit of the appropriate diameter. The hole should be cleaned of drilling dust before applying the anchor; it is recommended not to use roto-percussion when drilling the hole on a wall with perforated brick so as not to break the internal bulkheads. Insert the anchor and carry out the desired installation.

Technical Features

Via Marco Polo 33
35020 Albignasego
Padova – Italy


P.IVA: 03859580288
Tel: +39 049 8625910
Mail: info@tecnogas.net

Anchor

ANCHOR MATERIAL	SCREW MATERIAL	MINIMUM DRILLING DEPTH	MAXIMUM FIXABLE THICKNESS	A	S	H	R
POLYAMIDE 6	7-8 ?M ELECTROGALVANIZED TREATED STEEL	65 MM	15 MM	8,4X16X1,6 MM	50 MM	7X70 MM	10 MM

SKU	MODEL	PRICE
00000011885	ANCHOR WITH HEX HEAD SCREW	€2.0 VAT EXCLUDED



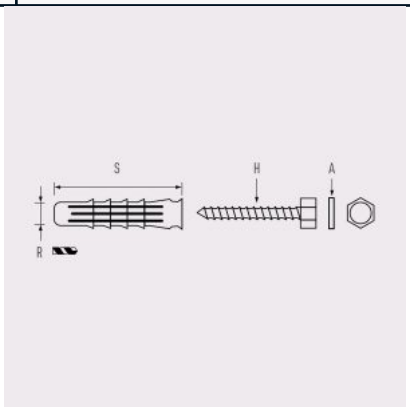

Via Marco Polo 33
35020 Albignasego
Padova – Italy

P.IVA: 03859580288
Tel: +39 049 8625910
Mail: info@tecnogas.net