MULTIDIRECTIONAL PLENUM

Mod. PLM-H10

Product informations

MULTIDIRECTIONAL DISTRIBUTION PLENUM 10 SPIGOTS COMPLETE OF CALIBRATION DAMPER

Multidirectional distribution Plenum made of galvanized sheet with internal acoustic insulation. Equipped with 10 spigots diameter 75/90 mm complete of calibration damper with external lever control (PLUG) and 3 sealing caps.

The connection panel can be rotated to configure the inlet and outlet either in-line or at a 90° angle to each other (FIG 2).

Technical Features

DIMENSIONS									
A	*B*	*C*	*ØD*	*E*	*F*	*G*	*H*	*I*	*M*
442 MM	624 MM	202 MM	156 MM	83.5 MM	674 MM	654 MM	345 MM	40 MM	38 MM

SKU	MODEL	PRICE

TECNOGAS
I percorsi della tecnologia.

Via Marco Polo 33
35020 Albignasego
Padova – Italy

P.IVA: 03859580288
Tel: +39 049 8625910
Mail: info@tecnogas.net

Multidirectional plenum

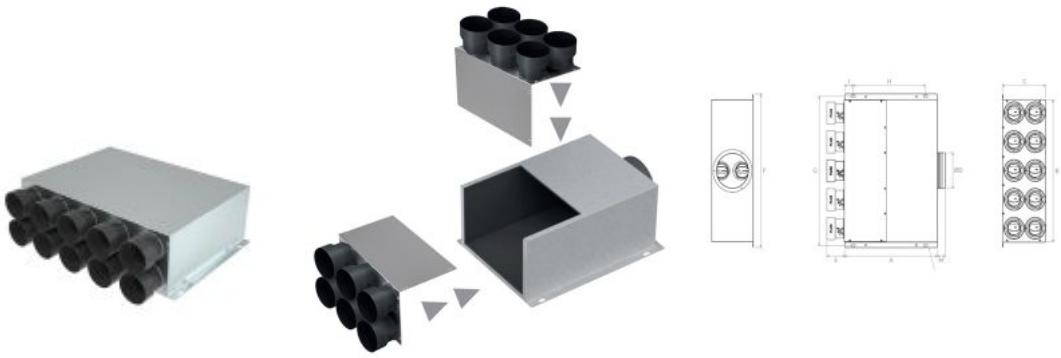

Via Marco Polo 33
35020 Albignasego
Padova – Italy

P.IVA: 03859580288
Tel: +39 049 8625910
Mail: info@tecnogas.net