



Catalogues and Products > Heating > High and Low Pressure Lpg Regulators for Civil-industrial Applications > **First Stage Regulator Mod. AP 30**

FIRST STAGE REGULATOR MOD. AP 30

Model with pressure gauge, safety valve and fixed or external setting, flow rate 25-40 kg/h

Product informations

First stage high pressure regulator **Mod. AP 30**, equipped with safety valve and pressure gauge; designed to be connected directly to the tank or cylinder, reducing the pressure to an intermediate pressure towards a second stage regulator.


Technical Features

| | |
|------------------------------|---|
| TYPES OF GAS | LPG |
| FLOW RATE | <ul style="list-style-type: none"> • 25-40 KG - SKU 2341 • 30 KG - SKU 2331 / 2345 |
| OPERATING TEMPERATURE | - 20°C ÷ + 50°C |
| INLET PRESSURE | 2,5 ÷ 16 BAR |
| SAFETY VALVE SETTING | 4 BAR |
| PRESSURE GAUGE RANGE | 0 - 4 BAR |
| OUTLET PRESSURE | <ul style="list-style-type: none"> • 0,5 ÷ 2 BAR EXTERNAL SETTING - SKU 2341 • 1,5 BAR FIXED SETTING - SKU 2331 • 0,75 BAR FIXED SETTING - SKU 2345 |
| CONNECTION | IN LEFT NUT W20LH-25-UN - OUT 3/8" F |
| MATERIALS | <ul style="list-style-type: none"> • BODY AND COVER: ZAMAK • DIAPHRAGM AND GASKETS: LPG RESISTANT ELASTOMER |



First Stage Regulator Mod. AP 30

| SKU | MODEL | PRICE |
|-------------|---|------------------------|
| 00000002331 | HIGH PRESSURE REGULATOR MOD. AP 30 - IN LEFT NUT W20LH-25-UN - OUT 3/8" F - FLOW RATE 30 KG/H | €89.75 VAT EXCLUDED |
| 00000002341 | HIGH PRESSURE REGULATOR MOD. AP 30 - IN LEFT NUT W20LH-25-UN - OUT 3/8" F - FLOW RATE 25-40 KG/H | €82.25 VAT EXCLUDED |
| 00000002345 | HIGH PRESSURE REGULATOR MOD. AP 30 - IN LEFT NUT W20LH-25-UN - OUT 3/8" F - FLOW RATE 30 KG/H | €64.95 VAT EXCLUDED |

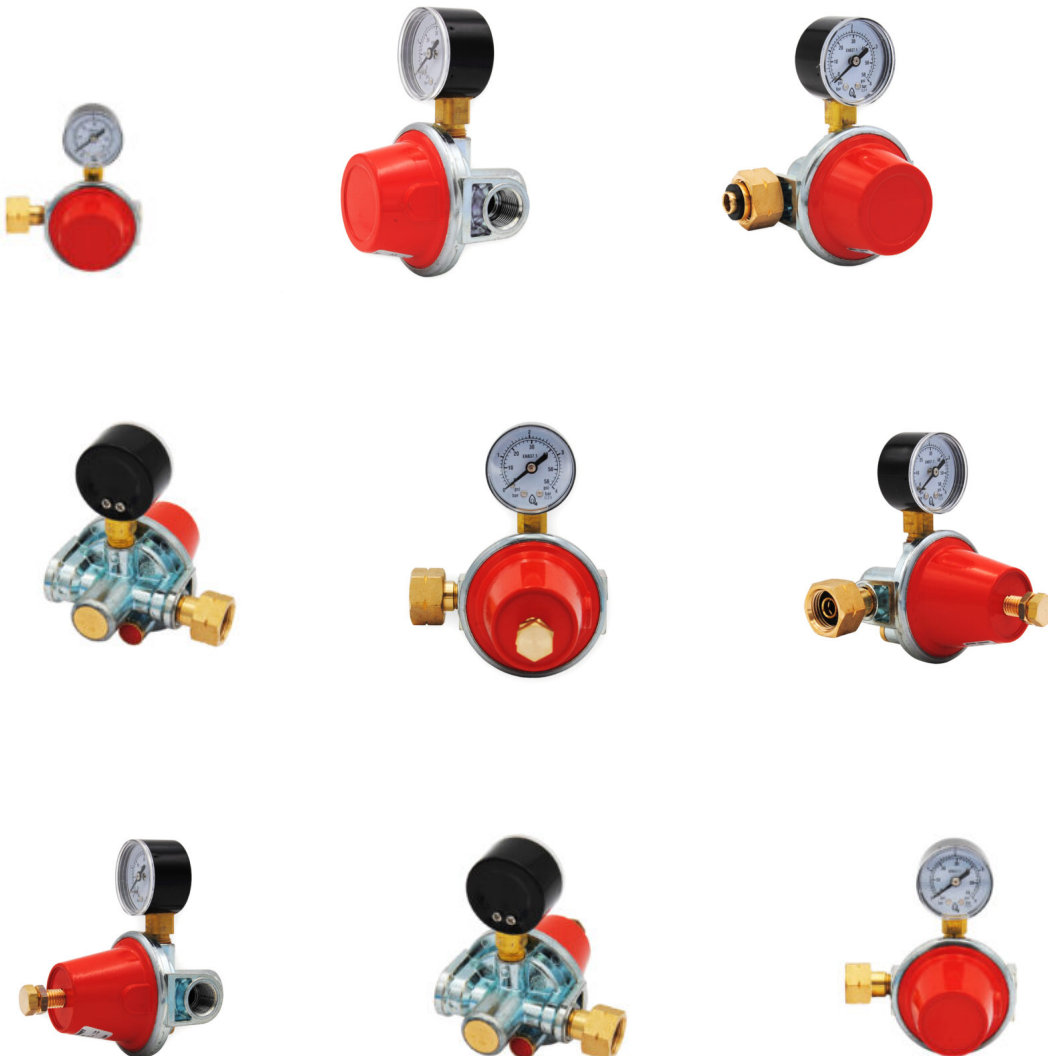



First Stage Regulator Mod. AP 30

