



## REDUCED NOZZLES

For copper pipes

### Product informations

Reduced nozzles essential to connect the copper pipe with the indoor or outdoor unit of the air conditioner.

### Product features

- forged from forged brass or drawn brass bar that eliminate the possibility of leakage due to porosity in the material
- low-roughness internal mechanical processing to ensure lower pressure drop and higher refrigeration flow rate in joints
- suitable for HCFC, HFC and R744 (CO<sub>2</sub>) refrigerants, *not suitable for ammonia*

### Technical Features

SKU	ANSI/ASME B1.1 THREAD (FEMALE)	CONNECTION	TIGHTENING TORQUE NM (LBF-FT)	TEMPERATURE RANGE	MAXIMUM RECOMMENDED PRESSURE	MATERIAL
11285	5/8" - 18 UNF	3/8"	20 ÷ 25 (15 ÷ 18.5)	- 40°C ÷ + 150°C	140 BAR	BRASS
11286	3/4" - 16 UNF	1/2"	34 ÷ 47 (25 ÷ 34.5)			
11287	7/8" - 14 UNF	5/8"	54 ÷ 75 (40 ÷ 55)			




## Reduced Nozzles

SKU	MODEL	PRICE
00000011285	REDUCED NOZZLE 1/4" - 3/8" SAE - 10 PCS.	€3.1 VAT EXCLUDED
00000011286	REDUCED NOZZLE 1/2" - 3/8" SAE - 10 PCS.	€3.75 VAT EXCLUDED
00000011287	REDUCED NOZZLE 5/8" - 1/2" SAE - 10 PCS.	€5.8 VAT EXCLUDED



Sku 11285

Sku 11286

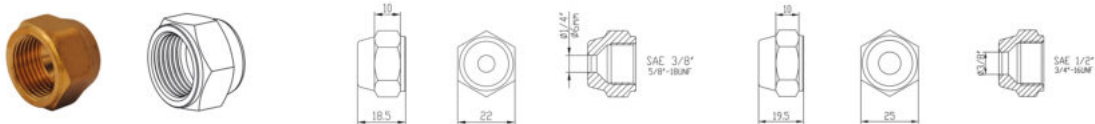

Sku 11287

