LOW PRESSURE REGULATOR

Model DIVAL 507 and 512

Product informations

Low pressure regulator Mod. DIVAL 507 and 512 equipped with incorporated safety relief valve and internal sensing line, to be used with previously filtered not corrosive gases.

Also available in the version with shut-off valve for maximum and minimum downstream pressure (*sku 1210B / 1220B*).

Technical Features

SKU	*MODEL*	*FLOW RATE*	*CONNECTIONS*	*VENT VALVE DIAMETER*	*INLET PRESSURE*	*OUTPUT PRESSURE RANGE*	*STANDARD PRESSURE*	*ROOM TEMPERATURE*	*MATERIALS*	*DIMENSIONS*
1210	DIVAL 507	60 KG/H - 50 M^3/H	IN 1" F - OUT 1" F	Ø 1/4" F	0,5 ÷ 5 BAR	15 ÷ 110 MBAR	20 ÷ 30 MBAR	- 20°C ÷ + 50°C	• BODY: GS 400 CAST IRON • HEADER: ALUMINUM • SEAT: BRASS • MEMBRANE: RUBBER WITH FABRIC FINISH • O-RING: NITRILE RUBBER	100 X 190 X 49 X 185,5 MM (AXBXCXD)
1210B	DIVAL 507 *WITH SHUT-OFF VALVE*	60 KG/H - 50 M^3/H								100 X 190 X 185 X 185,5 MM (AXBXCXD)
1220	DIVAL 512	120 KG/H - 100 M^3/H	IN 1" F - OUT 1" 1/2 F							129 X 257 X 55 X 185,5 MM (AXBXCXD)
1220B	DIVAL 512 *WITH SHUT-OFF VALVE*	120 KG/H - 100 M^3/H								129 X 194 X 185 X 185,5 MM (AXBXCXD)

TECNOGAS
I percorsi della tecnologia.

Via Marco Polo 33
35020 Albignasego
Padova – Italy

P.IVA: 03859580288
Tel: +39 049 8625910
Mail: info@tecnogas.net

Low Pressure Regulator

SKU	MODEL	PRICE
00000001210	REGULATOR MOD. DIVAL 507 - IN 1" F - OUT 1" F	ON REQUEST
00000001220	REGULATOR MOD. DIVAL 512 - IN 1" F - OUT 1" 1/2 F	ON REQUEST
0000001210B	REGULATOR MOD. DIVAL 507 - IN 1" F - OUT 1" F - WITH SHUT-OFF VALVE	ON REQUEST
0000001220B	REGULATOR MOD. DIVAL 512 - IN 1" F - OUT 1" 1/2 F - WITH SHUT-OFF VALVE	ON REQUEST



Via Marco Polo 33
35020 Albignasego
Padova – Italy

P.IVA: 03859580288
Tel: +39 049 8625910
Mail: info@tecnogas.net

Low Pressure Regulator



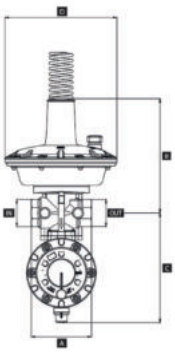

Via Marco Polo 33
35020 Albignasego
Padova – Italy

P.IVA: 03859580288
Tel: +39 049 8625910
Mail: info@tecnogas.net